
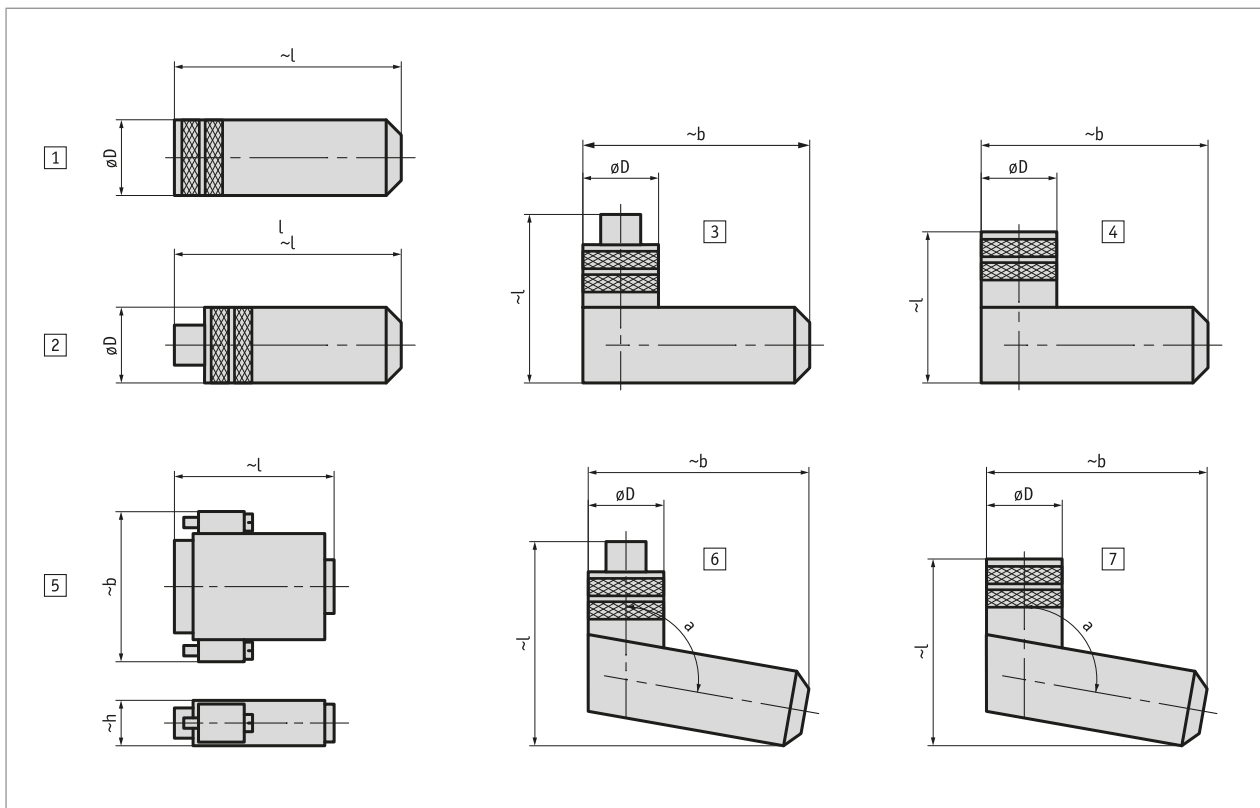


Profile

- Mating connector, straight
- Mating connector, offset
- D-SUB connector
- Bus terminator, straight

 When screwed, the distance to the device will increase by approx. 3 mm.



Order

■ Overview of orders

Order key	Photo	Type	PIN	Designation	ø Cable	øD	l	b	h	a
71364+71365	5	D-SUB	9	pin+shell	≤8.5		35	31	15.5	
71366+71365	5	D-SUB	9	socket+shell	≤8.5		35	31	15.5	
73947+73946	5	D-SUB	15	socket+shell	≤8.5		42	40	15.2	
76141	1	M16	7	bushing	4 ... 6	18.5	61			
76572	1	M16	12	bushing	6 ... 8	18.5	62			
77087	1	M16	7	bushing	6 ... 8	18.5	62			
78088	4	M16	7	"angle socket"	4 ... 6	20	38	54		
79665	4	M16	7	"angle socket"	6 ... 8	20	38	54		
79666	4	M16	12	"angle socket"	6 ... 8	20	38	54		
81351	1	M9	8	bushing	3.5 ... 5	14	38			
81363	4	M16	3	"angle socket"	4 ... 6	20	38	54		
81487	1	M9	3	bushing	3.5 ... 5	14	38			
81935	1	M23	12	bushing	≤8.5	26	51.1			
82182	1	M16	3	bushing	4 ... 6	18.5	61			
82247	4	M9	4	"angle socket"	3.5 ... 5	14	30	30.5		
82366	4	M9	3	"angle socket"	3.5 ... 5	14	30	30.5		
82804	7	M12 B-Cod.	5	"angle socket"	4 ... 8	19	48	41		100°
82805	6	M12 B-Cod.	5	"angular pin"	4 ... 8	19	50	41		100°
82815	2	M12 A-Cod.	5	bus terminating plug (CAN)		14.5	55			
82816	2	M12 B-Cod.	5	bus terminating plug (PB)		14.2	44			
83006	7	M12 A-Cod.	5	"angle socket"	4 ... 8	19	48	41		100°
83007	6	M12 A-Cod.	5	"angular pin"	4 ... 8	19	50	41		100°
83091	7	M12 A-Cod.	4	"angle socket"	4 ... 8	19	48	41		100°
83419	1	M12 A-Cod.	4	bushing	4 ... 6	20	54			
83447	1	M9	4	bushing	3.5 ... 5	14	38			
83525	1	M12 A-Cod.	8	bushing	6 ... 8	20	57			
83526	1	M12 A-Cod.	4	bushing	6 ... 8	20	57			
83527	2	M12 A-Cod.	8	pin	6 ... 8	20	62			
83991	1	M12 B-Cod.	5	bushing	6 ... 8	20	57			
83992	2	M12 B-Cod.	5	pin	6 ... 8	20	62			
84109	1	M12 A-Cod.	5	bushing	6 ... 8	20	57			
84209	1	M8	4	bushing	3.5 ... 5	12	43			
84210	2	M8	4	pin	3.5 ... 5	12	50			
84732	2	M12 A-Cod.	5	pin	6 ... 8	20	62			
85057	1	M16	3	bushing	6 ... 8	18.5	62			
85058	4	M16	3	"angle socket"	6 ... 8	20	38	54		
85277	1	M12 A-Cod.	12	bushing	6 ... 8	20	57			
85278	4	M12 A-Cod.	12	"angle socket"	6 ... 8	20	38	54		
87599	7	M12 A-Cod.	8	"angle socket"	4 ... 8	19	48	41		100°
87600	3	M12 D-Cod.	4	"angular pin"	6 ... 8	20	42	54		
87601	2	M12 D-Cod.	4	pin	6 ... 8	20	63			
89115	1	M12 T-Cod.	4	bushing	5 ... 8	20	65			
BAS-0005	2	M8	4	bus terminating plug		12	45			

■ Order key

Mating connector

-



Scope of delivery:
Mating connector